

Single Acting & Double Acting Pneumatic Actuator

VA-SPA / VA-DPA

The Trusted, Passionate and focused Partner in Valve Automation

At V.A.Valves, The founding principle of V.A.Valves is simple: to Listen our customers needs first, to develop the innovative valve actuators solutions , to meet the unique needs of our customers, Along the way, To help our customers to solve the problems in Valve Automation. We are growing our brand in Pneumatic and Electric Actuators, Accessories..



Experienced team



Large inventory



Convenient consultation

WHY WE ARE DIFFERENT

We offer a complete valve automation solution by the applications experience and customization capabilities, with an experienced support team to guide you in selection, installation, and project support. In addition we maintain an extensive supply of product inventory on hand so that we can quickly fulfill orders and reduce wait times. Our sales and support staff are readily available and accessible so that customers get the answers they need quickly.

THE TARGET WE ARE PURSUING



High-quality



low cost



Reliable solution

- To built A strong Reputation in Providing Quality, Cost Effective , Reliable And Robust Performance Solutions for Valve Automation,
- Included Pneumatic Actuators, Electrically Actuators, Actuated Valves.

COMMITMENT TO QUALITY

All products manufactured by V.A.Valves are warranted against defects in material and workmanship for a period of 12 months from the day of startup. Each of our products are tested at the factory. we are confident that our products meet or exceed all applicable standards before they ever leave our facility. We are an ISO 9001-2015 certified company. Our Valve Actuators Has Applied for SIL3 Certificate, ATEX Certificate ,CE, Explosion-proof Certificate, IP68 Weather proof etc....

Pneumatic Actuator

Description



Pneumatic actuator is prelubricated and tested to a min one million operations. Actuators are available in double acting and spring return models. They meet international ISO5211 standards for easy valve mounting and replacement. Visual position indicator will monitor the open and closed position.

Standard Specification



- Movement: Standard adjustable $90^\circ \pm 5\%$
- Lubrication: All moving parts are lubricated for life-long cycle
- Cycle Life: 1,000,000 Operations
- Body: Hard anodized extruded Aluminium alloy
- Indicator: Open /Close Disc
- Travel Stops: External adjustable $\pm 5\%$ in both open/closed position
- Springs: High tensile spring sets of alloy steel
- Piston Shaft: Nickel plated alloy steel reduces friction
- Piston Guides: Self lubricating (Polypropylene + Carbon), Piston Seals Nitrile**
- Piston: Die casted aluminium dual piston
- End Caps: Polyester coated die cast aluminium

Working Pressure



- Standard Temperature: $-20 \sim +80$ Degree
- Low Temperature: $-50 \sim +80$ Degree
- High Temperature: $-15 \sim +150$

Testing For All Actuators



All actuators manufactured by V.A.Valves are individually tested. Testing is carried out to check the leakage in both internal and external. The angle of rotation and Torque values. All bodies are stamped with year, month of production, size and serial number.

Range of Standard Accessories are Available for Direct Mounting

1

Solenoid Valve

2

Limit Switchboxes

3

Electro-pneumatic
Positioner


4

Declutchable Manual
Override Gearbox

5

High Visibility
Indicator


Interface Specification



Drive and Flange to ISO5211 configuration for easy direct mount onto a valve or connection with standardized mounting hardware.







The NAMU R Drive Pinion and NAMU R top mounting connection for direct installation of accessories such as Limit Switch and Positioner.

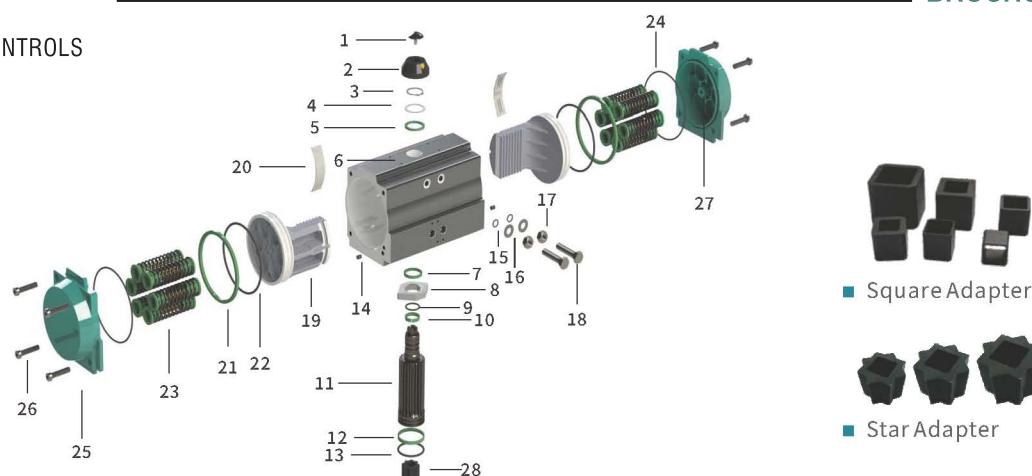


Air supply connection is designed in accordance with NAMU R Standard to install solenoid valve.

Bottom View Iso5211


DOUBLE
SQUARE

SINGLE SQUARE
PARALLEL


INDUSTRIAL VALVES & CONTROLS



	Description	Material	ty		Description	Material	ty
1	Indicator Screw	ABS	1	14	Hole Sealant	N B R (VITON or EPDM on reuest)	2
2	Position Indicator	ABS	1	15	O-ring Adjust Screw	N B R (VITON or EPDM on reuest)	2
3	Spring Clip	Stainless Steel 304	1	16	Washer Adjust Screw	Stainless Steel 304	2
4	Metal Washer	Stainless Steel 304	1	17	Nut Adjust Screw	Stainless Steel 304	2
5	OeWr asher	Engineering Plastic	1	18	Adjust Screw	Stainless Steel 304	2
6	Body	Extruded Aluminum Alloy	1	19	Piston	Die Cast Aluminum Alloy	2
7	Inner Washer	Engineering Plastic/Hard Anodized	1	20	Piston B earing	Engineering Plastic/Anodized	2
8	Travel Stop	AlloySteel	1	21	Bearing Piston	Engineering Plastic	2
9	O-ring Pinoin Top	N B R (VITON or EPDM on reuest)	1	22	O-ring Piston	N B R (VITON or EPDM on reuest)	2
10	Bearing Pinoin Top	Engineering Plastic	1	23	Spring Group	Spring Steel	0~12
11	Pinion	AlloySteel (Electroless Nickel Plated) /SS304 is Optional	1	24	O-ring End Cap	N B R (VITON or EPDM on reuest)	2
12	Bearing	Engineering Plastic	1	25	End Cap	Cast Aluminum/Polyester Paint	2
13	Bearing Pinoin bottom	N B R (VITON or EPDM on reuest)	1	26	Cap Screw	Stainless Steel 304	8
				27	Stop Screw	Stainless Steel 304	2
				28	Star Adaptor	Carobon Steel	1

Output Torque Of Double Acting Actuators

Model	Air supply pressure(Unit:bar)									
	2	2.5	3	4	4.5	5	5.5	6	7	8
DPA-32	3	4	5	6	7	8	8	9	11	12
DPA-40	5	6	7	10	11	12	13	14	17	19
DPA-50	8	10	12	16	18	20	22	24	28	32
DPA-63	15	18	22	29	33	36	40	44	51	58
DPA-75	20	25	30	40	45	50	55	60	70	80
DPA-83	31	39	47	63	70	78	86	94	110	125
DPA-92	45	56	68	90	102	113	124	135	158	181
DPA-105	66	83	99	132	149	165	182	198	231	264
DPA-125	100	125	150	200	226	251	276	301	351	401
DPA-140	171	214	256	342	385	427	470	513	598	684
DPA-160	266	332	399	532	598	665	731	798	931	1064
DPA-190	426	532	638	851	958	1064	1170	1277	1490	1702
DPA-210	532	665	798	1064	1197	1330	1463	1596	1862	2128
DPA-240	769	932	1154	1539	1731	1924	2116	2308	2693	3078
DPA-270	1170	1462	1754	2339	2632	2924	3216	3509	4094	4679
DPA-300	1526	1908	2289	3052	3434	3815	4197	4578	5341	6104
DPA-350	2285	2856	3427	4570	5141	5712	6283	6854	997	9139
DPA-400	3256	4070	4884	6512	7326	8140	8954	9768	11396	13024

Air Consumption And weight Table

Model	DA Weight (Kgs)	SR Weight (Kgs)	Air Volume opening	Air Volume closing	Model	DA Weight (Kgs)	SR Weight (Kgs)	Air Volume opening	Air Volume closing	Model	DA Weight (Kgs)	SR Weight (Kgs)	Air Volume opening	Air Volume closing
DPA/SPA-32	0.7	-	0.04	0.05	DPA/SPA-92	4.6	5.2	0.64	0.473	DPA/SPA-210	47	55	7.5	7.5
DPA/SPA-40	1	1.1	0.08	0.11	DPA/SPA-105	6.8	6.9	0.95	0.88	DPA/SPA-240	67	80	11	9
DPA/SPA-52	1.4	1.5	0.12	0.16	DPA/SPA-125	8.9	10.1	1.6	1.4	DPA/SPA-270	97	118	17	14
DPA/SPA-63	2	2.1	0.21	0.23	DPA/SPA-140	13	15	2.5	2.2	DPA/SPA-300	110	130	23.8	29.7
DPA/SPA-75	2.7	2.9	0.3	0.34	DPA/SPA-160	20	24	3.7	3.2	DPA/SPA-350	186	234	35.1	46.3
DPA/SPA-83	3.1	3.6	0.43	0.47	DPA/SPA-190	31	35	5.9	5.4	DPA/SPA-400	289	360	52.6	56

INDUSTRIAL VALVES & CONTROLS

Main Product features



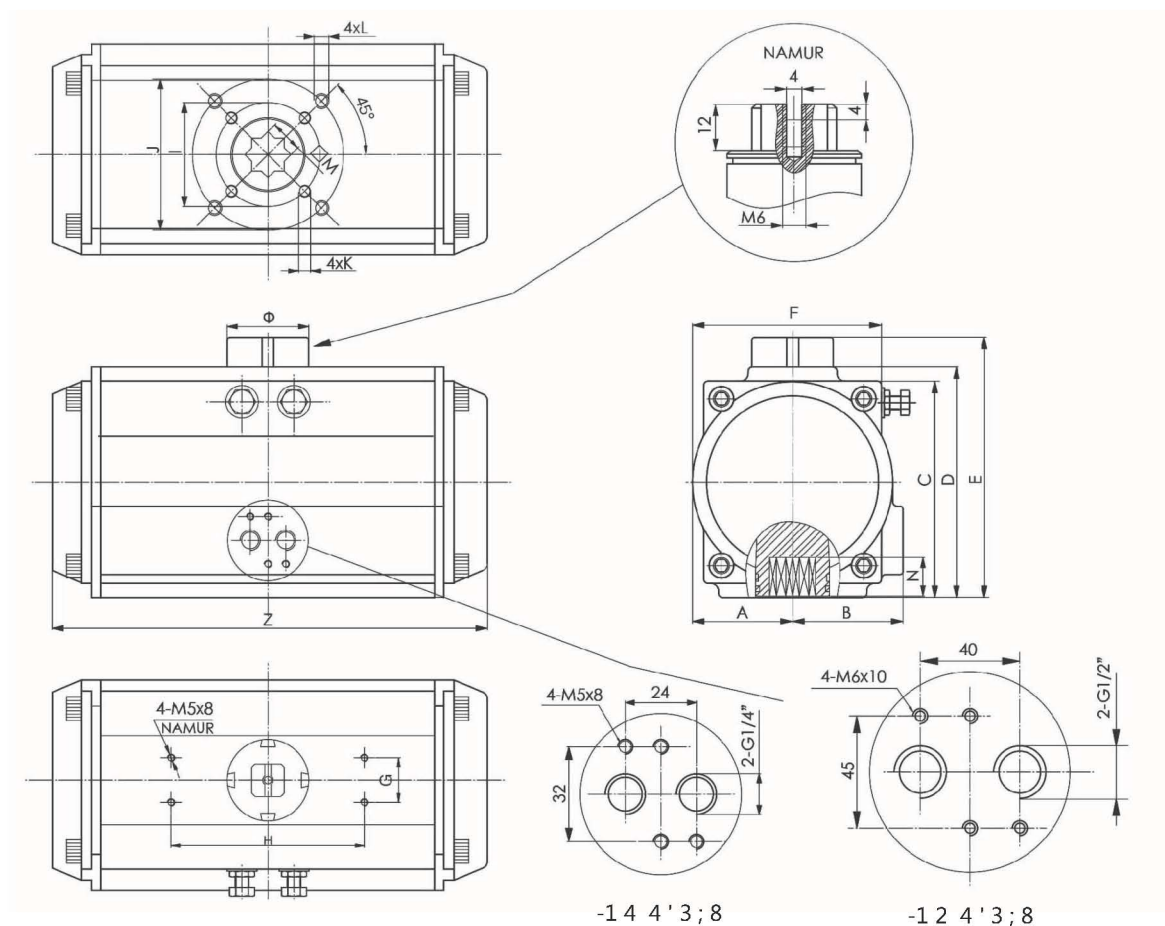
- Extruded Aluminum Body
- Die-Cast Aluminum End Caps
- Position Indicator with Namur Slot
- I Blow-Out Proof Pinion
- Dual Opposed Rack Pistons
- Adjustable Travel Stops
- Namur Solenoid Mount Design

Output Torque Of Spring Return Actuators

Output torque of air springs																	Spring's output	
Air pressure		2.5BAR		3BAR		4BAR		5BAR		6BAR		7BAR		8BAR				
Model	Spring Qty.	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	0° Start	90° End	90° Start	0° End	
SPA-52	5	5.7	3.8	7.6	5.7	/	/	/	/	/	/	/	/	/	/	6.2	4.3	
	6	4.9	2.5	6.9	4.5	10.9	8.5	/	/	/	/	/	/	/	/	7.4	5	
	7	4	1.3	6	3.3	9.8	7.3	14	10.4	/	/	/	/	/	/	8.6	5.9	
	8	/	/	5.2	2	9.2	6	13.2	9.1	17.2	14.1	/	/	/	/	9.9	6.7	
	9	/	/	4.3	0.8	8.3	4.8	12.3	7.9	16.3	12.8	20.3	16.8	/	/	11.1	7.6	
	10	/	/	/	/	7.4	3.6	11.5	6.7	15.5	11.6	19.5	15.6	/	/	12.4	8.5	
	11	/	/	/	/	6.6	2.3	10.6	5.4	14.6	10.4	18.6	14.3	22.6	18.3	13.6	9.3	
	12	/	/	/	/	/	/	9.7	4.2	13.8	9.1	17.8	12.2	21.8	17.1	14.8	10.2	
SPA-63	5	11.4	7.7	15	11.4	22.3	14.9	/	/	/	/	/	/	/	/	10.4	6.8	
	6	10.1	5.7	13.6	9.3	20.9	16.6	28.3	23.9	/	/	/	/	/	/	12.5	8.2	
	7	8.6	3.6	12.5	7.2	19.5	14.5	26.8	21.9	/	/	/	/	/	/	14.6	9.6	
	8	/	/	10.9	5.1	18.2	12.4	25.5	19.8	32.8	27	40.1	34.3	/	/	16.7	10.9	
	9	/	/	/	/	16.8	10.4	24.1	17.7	31.4	24.9	38.7	32.2	/	/	18.8	12.3	
	10	/	/	/	/	1.4	8.2	22.8	15.6	30	22.8	37.3	30.1	44.7	37.4	20.9	13.7	
	11	/	/	/	/	/	/	21.5	13.5	28.7	20.7	36	28	43.3	35.3	22.9	15	
SPA-75	12	/	/	/	/	/	/	20	11.4	27.3	18.6	34.6	25.9	41.9	33.3	25	16.4	
	5	14.5	10.5	19.4	15.5	29.5	25.7	/	/	/	/	/	/	/	/	14.5	10.5	
	6	12.4	7.6	17.3	12.6	27.4	22.7	37.5	32.8	/	/	/	/	/	/	17.4	12.7	
	7	10.4	4.8	15.2	9.7	25.3	19.9	35.4	29.9	/	/	/	/	/	/	20.3	14.8	
	8	/	/	31.1	6.8	23.1	16.9	33.3	27	43.2	37	53.3	47	/	/	23.2	16.9	
	9	/	/	/	/	21	14.1	31.2	24.1	41.1	34.1	51.2	44.2	/	/	26.1	19	
	10	/	/	/	/	19	11.1	28.8	21.2	39	31.2	49.1	41.2	59.1	51.2	29	21.1	
	11	/	/	/	/	/	/	27	18.3	37	28.3	47	38.4	57	48.4	31.9	23.2	
SPA-83	12	/	/	/	/	/	/	24.9	15.4	34.9	25.4	44.9	35.4	54.9	45.4	34.7	25.3	
	5	23.3	16.1	31.1	24	46.8	39.7	/	/	/	/	/	/	/	/	23	15.8	
	6	20.1	11.5	28	19.3	43.7	35.1	59.4	50.7	/	/	/	/	/	/	27.6	19	
	7	17	6.9	24.8	14.8	40.5	30.5	56.2	46.2	/	/	/	/	/	/	32.2	22.1	
	8	/	/	21.7	10.1	37.4	25.8	53.1	41.5	68.8	57.2	84.5	72.9	/	/	36.8	23.2	
	9	/	/	/	/	34.2	21.3	49.9	37	65.6	52.6	81.2	68.3	/	/	41.4	28.5	
	10	/	/	/	/	31	16.6	46.7	32.3	62.4	48	78.1	63.7	93.8	79.3	46	31.6	
SPA-92	11	/	/	/	/	/	/	43.6	27.7	59.3	43.4	75	59.1	90.6	74.8	50.6	34.8	
	12	/	/	/	/	/	/	40.4	23.2	56.1	38.9	71.7	54.5	87.4	70.2	55.2	38	
	5	33.1	22	44.2	33.2	66.8	55.9	/	/	/	/	/	/	/	/	34.4	23.3	
	6	28.4	15.2	39.6	26.4	62.2	49	84.8	71.6	/	/	/	/	/	/	41.2	28	
	7	23.8	8.2	34.9	19.4	57.5	42.1	80.2	64.7	/	/	/	/	/	/	48.1	32.7	
	8	/	/	31.3	12.6	52.9	35.2	75.5	57.9	98.1	80.5	120.7	103	/	/	55	37.3	
	9	/	/	/	/	48.2	28.4	70.9	51	93.5	73.6	116	96.1	/	/	61.9	42	
	10	/	/	/	/	43.6	21.5	66.2	44.1	88.8	66.7	111.3	89.2	134	111.8	68.7	46.7	
SPA-105	11	/	/	/	/	/	/	61.5	37.2	84.1	59.9	106.6	82.4	129.2	105	75.6	51.4	
	12	/	/	/	/	/	/	56.8	30.4	79.4	53	101.9	75.5	124.5	98.1	82.5	56	
	5	51	33.4	67.5	49.9	100.6	83	/	/	/	/	/	/	124.5	/	49.2	31.6	
	6	44.7	23.5	61.1	40	94.2	73.2	127.3	106.2	/	/	/	/	/	/	59.1	38	
	7	38.4	13.7	54.9	30.3	87.9	63.4	121	96.4	/	/	/	/	/	/	68.9	44.3	
	8	/	/	48.5	20.4	81.6	53.5	114.7	86.5	147.7	119.6	180.8	152.7	/	/	78.7	50.6	
	9	/	/	/	/	75.3	43.7	108.4	76.8	141.5	109.8	174.5	142.9	/	/	88.6	56.9	
	10	/	/	/	/	68.9	33.4	102	66.5	135.1	99.6	168.2	132.6	201.2	165.7	98.4	63.3	
SPA-125	11	/	/	/	/	/	/	95.7	57	127.7	90.1	161.8	123.1	194.8	156.2	108.3	69.6	
	12	/	/	/	/	/	/	89.4	47.5	122.5	80.6	155.5	113.6	188.6	146.7	118.1	75.9	
	5	73	47	98	72	148	122	/	/	/	/	/	/	/	/	79	52	
	6	63	31	88	56	138	107	188	157	/	/	/	/	/	/	94	63	
	7	52	15	77	40	127	90	178	141	/	/	/	/	/	/	110	73	
	8	/	/	67	25	117	75	167	125	217	176	268	226	/	/	125	84	
	9	/	/	/	/	107	59	157	109	207	159	257	210	/	/	141	94	
	10	/	/	/	/	96	44	146	94	196	144	247	194	297	245	157	105	
SPA-140	11	/	/	/	/	/	/	136	78	186	128	236	178	286	228	173	115	
	12	/	/	/	/	/	/	125	63	176	113	226	163	276	213	188	125	
	5	128	85	171	127	256	213	/	/	/	/	/	/	/	/	129	86	
	6	111	59	154	102	239	187	325	273	/	/	/	/	/	/	155	103	
	7	94	33	137	76	222	162	308	247	/	/	/	/	/	/	181	120	
	8	/	/	120	50	205	136	291	221	376	307	462	392	/	/	206	137	
	9	/	/	/	/	187	110	273	196	358	281	444	367	/	/	232	155	
	10	/	/	/	/	170	84	256	169	341	255	427	340	512	426	258	172	

INDUSTRIAL VALVES & CONTROLS

Output torque of air springs																	Spring's output	
Air pressure		2.5BAR		3BAR		4BAR		5BAR		6BAR		7BAR		8BAR				
Model	Spring Qty.	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°	
		Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	
SPA-160	5	193	124	259	191	392	324	/	/	/	/	/	/	/	/	208	140	
	6	165	83	232	149	365	282	498	415	/	/	/	/	/	/	250	168	
	7	137	41	203	107	336	240	469	373	/	/	/	/	/	/	292	196	
	8	/	/	176	66	309	199	442	237	575	465	708	598	/	/	333	223	
	9	/	/	/	/	280	157	413	290	546	423	679	556	/	/	375	251	
	10	/	/	/	/	253	115	386	248	519	381	652	514	785	647	417	279	
	11	/	/	/	/	/	/	358	207	491	340	624	473	757	606	458	307	
	12	/	/	/	/	/	/	330	165	463	298	596	431	729	564	500	335	
SPA-190	5	332	222	438	329	651	542	/	/	/	/	/	/	/	/	309	200	
	6	292	161	398	267	611	480	824	693	/	/	/	/	/	/	371	240	
	7	252	99	358	205	571	418	784	631	/	/	/	/	/	/	433	280	
	8	/	/	318	143	531	356	744	569	957	782	1169	995	/	/	495	320	
	9	/	/	/	/	491	295	704	507	917	720	1130	933	/	/	557	360	
	10	/	/	/	/	451	233	664	446	877	658	1090	871	1302	1084	618	400	
	11	/	/	/	/	/	/	624	384	837	597	1050	809	1263	1022	680	440	
	12	/	/	/	/	/	/	584	322	797	535	1010	748	1223	960	742	480	
SPA-210	5	390	285	523	418	789	684	/	/	/	/	/	/	/	/	380	275	
	6	335	209	468	342	734	608	1000	874	/	/	/	/	/	/	456	385	
	7	280	133	413	266	679	532	945	798	/	/	/	/	/	/	532	385	
	8	/	/	358	190	624	456	890	722	1156	988	1422	1254	/	/	608	440	
	9	/	/	/	/	569	380	835	646	1101	912	1367	1178	/	/	684	495	
	10	/	/	/	/	514	304	780	570	1046	836	1312	1102	1578	1368	760	550	
	11	/	/	/	/	/	/	725	494	991	760	1257	1026	1523	1292	836	605	
	12	/	/	/	/	/	/	670	418	936	684	1202	950	1468	1216	912	660	
SPA-240	5	552	409	744	600	1129	985	/	/	/	/	/	/	/	/	554	410	
	6	470	297	662	489	1047	874	1432	1259	/	/	/	/	/	/	665	492	
	7	388	187	580	379	964	764	1349	1149	/	/	/	/	/	/	775	575	
	8	/	/	498	268	883	653	1267	1037	1652	1422	2037	1807	/	/	886	656	
	9	/	/	/	/	800	542	1185	926	1569	1311	1954	1696	/	/	998	739	
	10	/	/	/	/	718	431	1103	816	1488	1201	1874	1586	2257	1970	1108	903	
	11	/	/	/	/	/	/	1021	705	1406	1090	1791	1474	2176	1859	1219	903	
	12	/	/	/	/	/	/	939	594	1323	979	1708	1363	2093	1748	1330	985	
SPA-270	5	903	675	1195	968	1779	1552	/	/	/	/	/	/	/	/	787	560	
	6	790	519	1083	811	1667	1396	2252	1984	/	/	/	/	/	/	943	672	
	7	679	361	972	654	1556	1238	2141	1823	/	/	/	/	/	/	1101	783	
	8	/	/	860	497	1444	1081	2029	1666	2614	2252	3199	2836	/	/	1258	895	
	9	/	/	/	/	1332	923	1917	1509	2502	2094	3087	2678	/	/	1416	1007	
	10	/	/	/	/	1220	767	1805	1352	2390	1937	2974	2521	3560	3107	1572	1119	
	11	/	/	/	/	/	/	1693	1194	2278	1779	2862	2364	3448	2949	1730	1231	
	12	/	/	/	/	/	/	1582	1037	2167	1623	2751	2207	3336	2792	1887	1342	
SPA-300	5	1097	729	/	/	/	/	/	/	/	/	/	/	/	/	1061	730	
	6	935	494	1316	875	/	/	/	/	/	/	/	/	/	/	1273	876	
	7	772	258	1153	639	1916	1402	/	/	/	/	/	/	/	/	1485	1022	
	8	/	/	991	403	1754	1166	2517	1929	/	/	/	/	/	/	1697	1168	
	9	/	/	/	/	1592	930	2355	1693	3118	2456	/	/	/	/	1909	1314	
	10	/	/	/	/	1430	695	2193	1458	2956	2221	3719	2984	4482	3747	2122	1460	
	11	/	/	/	/	/	/	2030	1222	2793	1985	3556	2748	4319	3511	2334	1606	
	12	/	/	/	/	/	/	1868	986	2631	1749	3394	2512	4157	3275	2546	1752	
SPA-350	5	1553	964	/	/	/	/	/	/	/	/	/	/	/	/	1702	1173	
	6	1292	586	1863	1157	/	/	/	/	/	/	/	/	/	/	2043	1408	
	7	1031	208	1602	779	2745	1922	/	/	/	/	/	/	/	/	2383	1642	
	8	/	/	1341	401	2484	1544	3626	2686	/	/	/	/	/	/	2724	1877	
	9	/	/	/	/	2224	1165	3336	2307	4508	3449	/	/	/	/	3064	212	
	10	/	/	/	/	1963	787	3105	1929	4247	3071	5390	4214	6532	5356	3405	2346	
	11	/	/	/	/	/	/	2844	1551	3986	2693	5129	336	6271	4978	3745	2581	
	12	/	/	/	/	/	/	2584	1172	3726	2314	4869	3457	6011	4599	4086	2816	
SPA-400	7	2028	869	/	/	/	/	/	/	/	/	/	/	/	/	2880	1837	
	8	1736	411	2550	1225	/	/	/	/	/	/	/	/	/	/	3292	2100	
	9	/	/	2259	768	3887	2396	/	/	/	/	/	/	/	/	3703	2362	
	10	/	/	1967	311	3595	1939	5223	3567	/	/	/	/	/	/	4115	2624	
	11	/	/	/	/	3303	1482	4931	3110	6559	4738	/	/	/	/	4526	2887	
	12	/	/	/	/	3012	1025	4640	2653	6268	4281	7895	5908	9523	7536	4938	3149	
	13	/	/	/	/	/	/	4348	2195	5976	3823	7603	5450	9231	7078	5349	3412	
	14	/	/	/	/	/	/	4057	1738	5685	3366	7312	4993	8940	6621	5761	3674	
	15	/	/	/	/	/	/	3765	1281	5393	2909	7020	4536	8648	6164	6172	3937	
16	/	/	/	/	/	/	/	/	5101	2452	6728	4078	8356	5707	6584	4199		

INDUSTRIAL VALVES & CONTROLS


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Z	Φ	Air Connection
DPA/SPA-32	23	23	46	46	66	46	25	50		Φ36		M5x8	9	11	110	Φ40	NAMUR G1/4"
DPA/SPA-40	28.5	36.5	60	60	80	52	30	80	Φ36	Φ50	M5x8	M6x10	11	14	122	Φ40	NAMUR G1/4"
DPA/SPA-50	30	41.5	65.5	72	92	65	30	80	Φ36	Φ50	M5x8	M6x10	11	14	147	Φ40	NAMUR G1/4"
DPA/SPA-63	36	47	81	88	108	72	30	80	Φ50	Φ70	M6x10	M8x13	14	18	168	Φ40	NAMUR G1/4"
DPA/SPA-75	42	53	94	99.5	119.5	81	30	80	Φ50	Φ70	M6x10	M8x13	14	18	184	Φ40	NAMUR G1/4"
DPA/SPA-83	46	57	98.5	108.7	128.7	92	30	80	Φ50	Φ70	M6x10	M8x13	17	21	204	Φ40	NAMUR G1/4"
DPA/SPA-92	50	58.5	111	116.5	136.5	98	30	80	Φ50	Φ70	M6x10	M8x13	17	21	262	Φ40	NAMUR G1/4"
DPA/SPA-105	57.5	64	122.5	133	153	109.5	30	80	Φ70	Φ102	M8x13	M10x16	22	26	268	Φ40	NAMUR G1/4"
DPA/SPA-125	67.5	74.5	145.5	155	185	127.5	30	130	Φ70	Φ102	M8x13	M10x16	22	26	301	Φ55	NAMUR G1/4"
DPA/SPA-140	75	77	161	172	202	137.5	30	130	Φ102	Φ125	M10x16	M12x20	27	31	390	Φ55	NAMUR G1/4"
DPA/SPA-160	87	87	184	197	227	159	30	130	Φ102	Φ125	M10x16	M12x20	27	31	458	Φ55	NAMUR G1/4"
DPA/SPA-190	103	103	215	230	260	189	30	130		Φ140		M16x25	36	40	525	Φ80	NAMUR G1/4"
DPA/SPA-210	113	113	235.5	255	285	210	30	130		Φ140		M16x25	36	40	532	Φ80	NAMUR G1/4"
DPA/SPA-240	130	130	264.5	289	319	245	30	130		Φ165		M20x25	46	50	602	Φ80	NAMUR G1/4"
DPA/SPA-270	147	147	299	326	356	273	30	130		Φ165		M20x25	46	50	718	Φ80	NAMUR G1/2"
DPA/SPA-300	162	174	330	350	380	312	30	130		Φ165		M20x25	46	50	760	Φ80	NAMUR G1/2"
DPA/SPA-350	190	195	483	410	440	365	30	130		Φ254	M20x25	8xM16x25	46	50	920	Φ80	NAMUR G1/2"
DPA/SPA-400	260	260	466	466	496	298	30	130		Φ254	M20x25	8xM16x25	46	50	940	Φ80	NAMUR G1/2"